

For more information,
please visit our website:

www.shanbei-tech.com
www.en.shanbei-tech.com

Product catalog
(English)

Version: V5.2

Ningbo Shanbei Technology Co.,Ltd

Address: 902 Area A, R&D Park, High-tech Zone, Ningbo, Zhejiang, China

WhatsApp: +86 13958081624

E-mail: jeff@hzbingo.cn

Wechat: 13958081624

WhatsApp →



Ningbo Shanbei Technology Co.,Ltd



Ningbo Shanbei Technology Co.,Ltd

Focus on the research and development, manufacturing, and full life-cycle services of core components for ship automation and propulsion control

Ningbo Shanbei Technology Co., Ltd. was established in April 2020. It is a national high-tech enterprise founded by high-level talents in Ningbo. The company has passed the quality management system certification of China Classification Society and is a member unit of the China Shipbuilding and Marine Engineering Industry Data Alliance and the Zhejiang Electric Ship Industry Alliance. Since its establishment, the company has been dedicated to the research and development of core components for ship automation and propulsion control.

The company focuses on the research and development, manufacturing, and full life cycle services of core components for ship automation and propulsion control. It provides high-reliability, domestically produced "power + control" key solutions for green and intelligent ships. The company has developed several products that reach the domestic leading level and have been widely applied to various large, medium and small ships both domestically and internationally, receiving high satisfaction from users.

The company has brought together a group of engineers with rich experience in the Marine electronics industry, and more than 50% of the developers, including senior talents engaged in communication, hardware, software and digital signal processing for a long time, with rich work experience, strong quality awareness, confidentiality awareness and rigorous and pragmatic work style. The company covers an area of about 1000 square meters, which is used for office, production and storage.

Customer achievement is our consistent insistence, through close cooperation with customers, to develop reliable products for actual needs, while improving our technical level. In the future, we will seize the historical opportunity of building a maritime power, adhere to the development strategy of innovation-driven, independent research and development, quality-oriented and value-oriented, and strive to become a leader in the field of smart ships.



We have applied for 28 intellectual property rights, obtained 4 authorized invention patents and 12 software Copyrights, and received over 20 certificates of various honors.



Content

1 Control lever	01
1.1 Propulsion control lever	03
1.2 Thruster control lever	09
1.3 Azimuth control lever	15
1.4 Rudder control hand wheel	23
1.5 Mode Selector	27
1.6 Non-Follow up handle	28
1.7 Multifunction Joystick	29
2 Monitor & Instruments	33
2.1 Instruments	35
2.2 Dimmer	37
2.3 Non-contact angle sensor	38
2.4 Multi function display unit	39
2.5 Shaft power meter	41
2.6 NMEA2000 bus topology connects the system	45
3 Remote control	47
3.1 Follow-up steering system	49
3.2 Main engine electronic control system	51
4 Other accessories	53
4.1 Heading sensor	55
4.2 Heading distributor	57
4.3 Compass repeater	58
4.4 Satellite compass	59
4.5 Rudder panoramic indicator	63
4.6 Rudder angle distributor	64
4.7 Single potentiometer type rudder angle feedback	65
4.8 Multi-potentiometer type rudder angle feedback	66



WLF-90 Propulsion control lever



Product introduction


The WLF-90 main control lever is suitable for single and dual main engine control in the propulsion systems of medium and small-sized ships.

The product is made of all-aluminum alloy, with a black powder-coated handle. The scale is backilluminated for indication. The control damping and gear feedback feel are adjustable. It meets the electromagnetic compatibility and vibration requirements of the IEC60945 standard and features a compact design, sturdy structure and high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5~55℃	≤1%	IP44

Detail

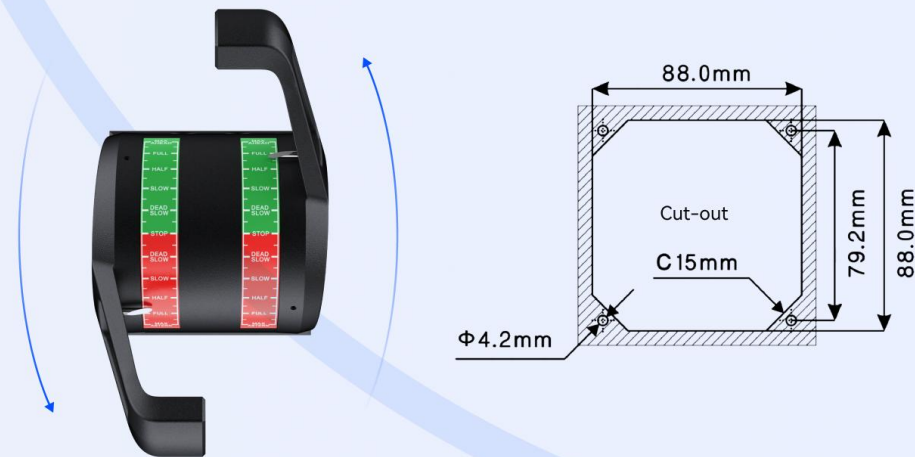

Appearance & function options

(Note: The first option is the default)

Handle type	• Dual(90D)				• Left Single(90L)		• Right Single(90R)	
Scale	• Percentage				• Chinese		• English	
Operating range	• ±60°				• 0~60°		• -15~60°	
Detent feedback	• Neutral only				• Three-level feedback		• Each position feedback	
Output signal	• 5K potentiometer				• 4~20mA		• Switch • CAN	
Backlight adjustment	• 0~24V				• Dimmer		• PWM	
Operation position	• FWD				• AFT			

Dimensions



WLF-100 Propulsion control lever



Product introduction



The WLF-100 is main promoted control lever is suitable for single and dual main engine control of high-end ship propulsion systems such as new energy ships and yachts.

The product features a chrome-plated appearance, with scale backlight indication. The control damping and gear feedback feel are adjustable. The dual handles can be synchronized through mechanical connecting rods. It meets the requirements of electromagnetic compatibility and vibration in the IEC60945 standard, and supports customized functions such as electric shaft synchronization. It has the advantages of a fashionable appearance and a good hand feel.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	-20~70℃	optional ≤0.5%	IP56

Detail

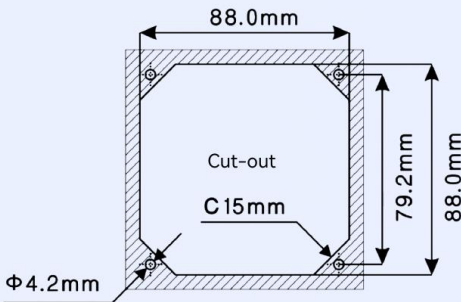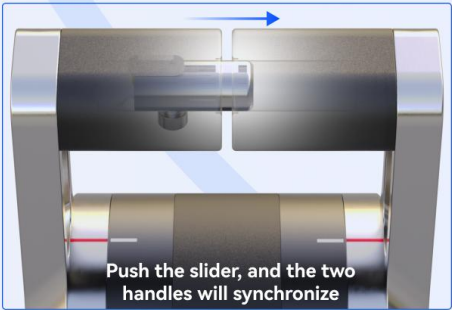

Appearance & function options

(Note: The first option is the default)

Handle type	• Dual(100D)	• Left Single(100L)	• Right Single(100R)	
Scale	• Percentage	• Chinese	• English	
Operating range	• ±60°	• 0~60°	• -15~60°	
Detent feedback	• Neutral only	• Three-level feedback	• Each position feedback	
Output signal	• 5K potentiometer	• 4~20mA	• Switch	• CAN
Backlight adjustment	• 0~24V	• Dimmer	• PWM	
Electric shaft synchronization	• No	• Yes		
Operation position	• FWD	• AFT		

Dimensions



WLF-180 Propulsion control lever



Product introduction


The WLF-180 main control handle is suitable for single and dual main engine control in the propulsion systems of large and medium-sized ships.

The aluminum alloy shell allows each scale to light up separately according to the grip position. The control damping and rotation range can be fine-tuned, meeting the requirements of electromagnetic compatibility and vibration in the IEC60945 standard. It supports customized functions such as electric shaft synchronization and scale for each position, featuring a fashionable and elegant appearance.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5~55℃	≤1%	IP56

Detail

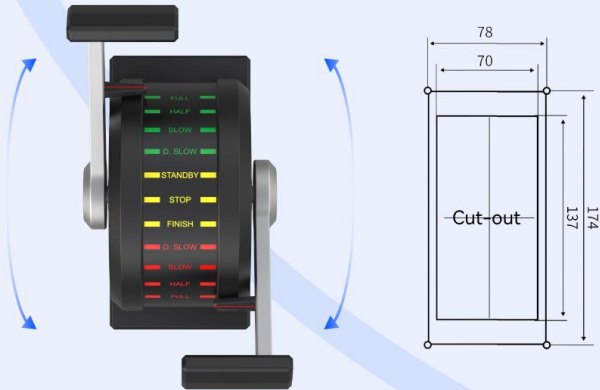

The scale light follows




Appearance & function options

(Note: The first option is the default)

Handle type	• Dual (180D)	• Left Single(180L)	• Right Single(180R)
Scale	• Chinese	• Percentage	• English
Operating range	• ±60°	• 0~60°	
Detent feedback	• Each position feedback		
Output signal	• 4~20mA	• Switch	
Backlight adjustment	• 0~24V		
Electric shaft synchronization	• No	• Yes	
Operation position	• FWD	• AFT	

Dimensions

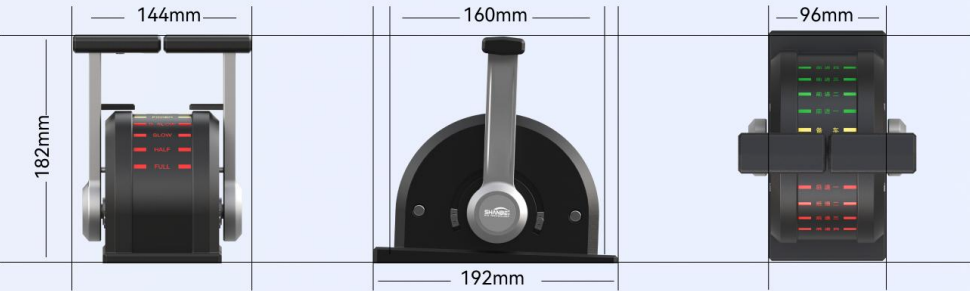

WLF-90C Thruster control lever



Product introduction


The WLF-90C side push control handle is suitable for the operation of the bow and stern side thrusters.

Made of all-aluminum alloy, the handle is black and powder-coated. The scale is backilluminated for indication. The control damping and gear feedback feel are adjustable. It meets the electromagnetic compatibility and vibration requirements of IEC60945 standard. It has the advantages of compact design, sturdy structure and high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5~55°C	≤1%	IP44

Detail

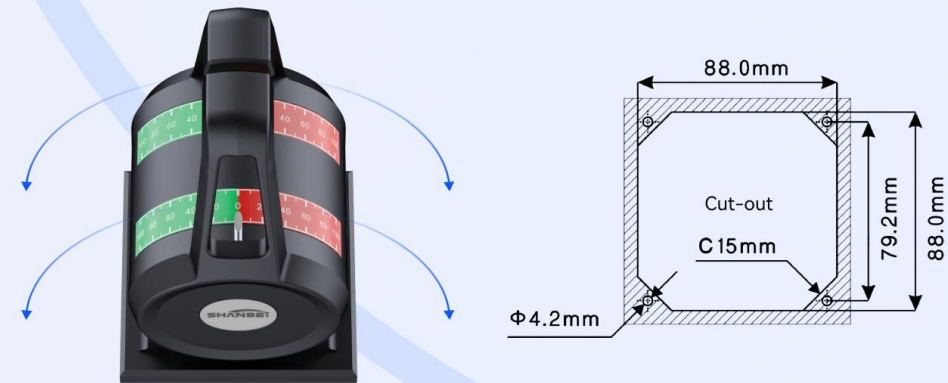

Appearance & function options

(Note: The first option is the default)

Handle style	• Standard style	• Short style	
Handle type	• Dual (C2)	• Up-Single(C1)	• Down-Single(C3)
Scale	• Percentage		
Operating range	• ±60°	• 0~60°	
Detent feedback	• Neutral only	• Feedback for each position	
Output signal	• 5K potentiometer	• 4~20mA	
Backlight adjustment	• 0~24V	• Dimmer	• PWM
Operation position	• FWD	• AFT	

Dimensions



WLF-100C Thruster control lever



Product introduction


The WLF-100C side push control handle is suitable for the operation of the bow and stern side thrusters.

The product features a chrome-plated appearance, with scale backlight indication. The control damping and gear feedback feel are adjustable. It meets the requirements of electromagnetic compatibility and vibration in the IEC60945 standard, and supports customized functions such as electric shaft synchronization. It has the advantages of fashionable appearance and good hand feel.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	-20~70℃	optional ≤0.5%	IP56

Detail

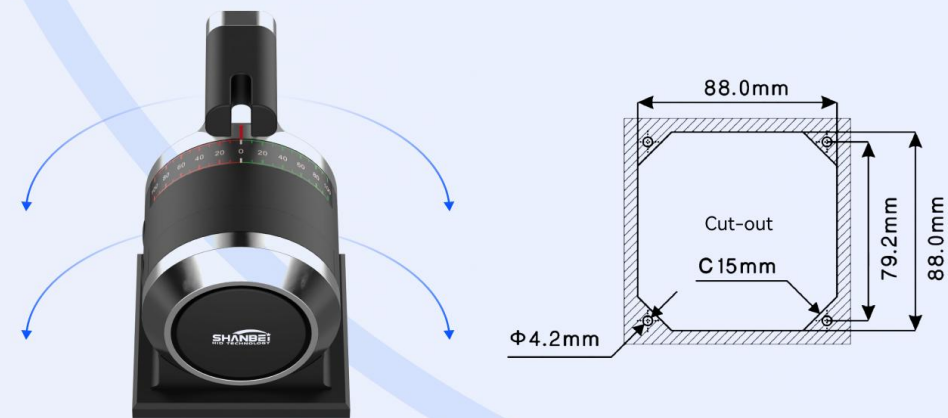

Appearance & function options

(Note: The first option is the default)

Handle type	• Dual(C2)	• Up-Single(C1)	• Down-Single(C3)
Scale	• Percentage		
Operating range	• ±60°	• 0~60°	
Detent feedback	• Neutral only	• Feedback for each position	
Output signal	• 5K potentiometer	• 4~20mA	• CAN
Backlight adjustment	• 0~24V	• Dimmer	• PWM
Electric shaft synchronization	• No	• Yes	
Operation position	• FWD	• AFT	

Dimensions





WLF-70 Azimuth control lever



Product introduction


The WLF-70 full-rotation control handle is used in various types of ships or test equipment where speed and orientation need to be adjusted simultaneously. It is generally placed on the electrical centralized control console to control the azimuth Angle, tilt Angle, thrust, speed, etc. of the thruster in a linked manner.

Made of all-aluminum alloy, the handle is black and powder-coated. The scale is backilluminated. The control damping, rotation damping and gear feedback feel are adjustable. It meets the electromagnetic compatibility and vibration requirements of IEC60945 standard. It has the advantages of compact design, solid structure and high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5 ~ 55 °C	≤1%	IP56

Detail

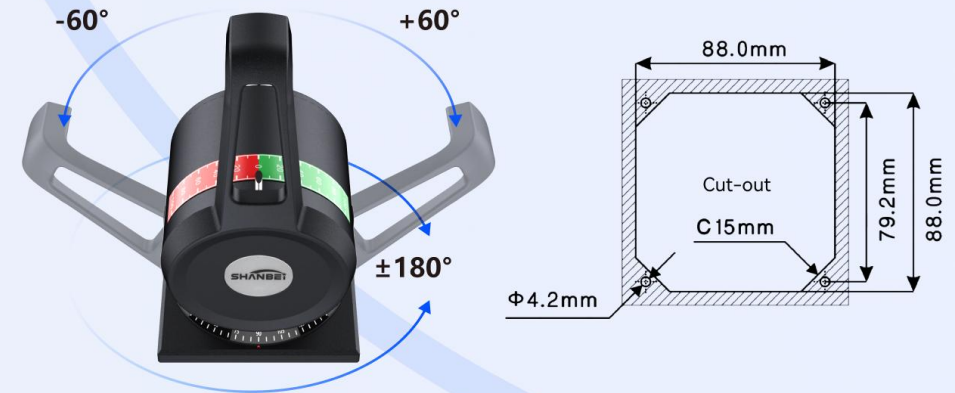

Appearance & function options

(Note: The first option is the default)

Handle type	• Left Single(70L) • Right Single(70R)
Operating range	• $\pm 60^\circ$ • $0 \sim 60^\circ$
Rotation range	• $\pm 180^\circ$
Output signal	• Propulsion/rotation: 4~20mA • Propulsion 5K/ rotation sincos
Backlight adjustment	• $0 \sim 24V$
Operation position	• FWD • AFT

Dimensions



WLF-72 Azimuth control lever



Product introduction


The WLF-72 full-rotation control handle is used in various ships or test equipment where both speed and orientation need to be adjusted simultaneously. It is generally placed on an electrical centralized control console to control the azimuth Angle, tilt Angle, thrust, and speed of the thruster in a linked manner.

Made of all-aluminum alloy, the handle is ergonomically designed for convenient long-term holding. The scale is backilluminated for indication, and the control damping, rotary damping, and gear feedback feel are adjustable. It meets the electromagnetic compatibility and vibration requirements of IEC60945 standards. The product supports multiple functional customizable features a compact design, sturdy structure, and high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5 ~ 55 °C	Propulsion ≤1% Rotation ≤0.5%	IP56

Detail

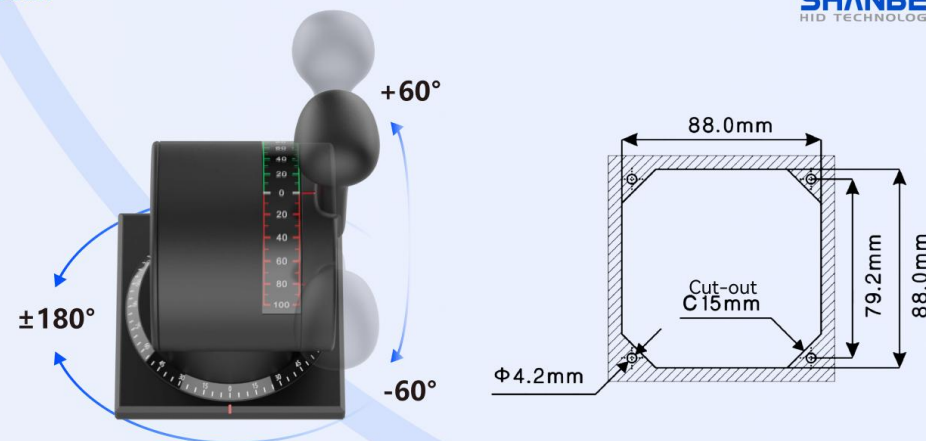

Appearance & function options

(Note: The first option is the default)

Handle style	• Ball head handle • Finger grip handle
Handle type	• Left Single(72L) • Right Single(72R)
Operating range	• $\pm 60^{\circ}$ • $0\sim 60^{\circ}$ • $-15\sim 60^{\circ}$
Rotation range	• $\pm 180^{\circ}$
Output signal	• Propulsion/rotation: $4\sim 20\text{mA}$ • Propulsion 5K/ rotation sincos • Switch
Backlight adjustment	• $0\sim 24\text{V}$
Operation position	• FWD • AFT
Electric Shaft Synchronization	• No • Yes

Dimensions



WLF-74 Azimuth control lever



Product introduction


The WLF-74 full-rotation control handle is used in various ships or test equipment where both speed and orientation need to be adjusted simultaneously. It is generally placed on an electrical centralized control console to control the azimuth Angle, tilt Angle, thrust, and speed of the thruster in a linked manner.

All-aluminum alloy material, grip, double-support structure, enhanced structural stability, high-precision control applications, two grips operated independently, dual-channel output, scale backlight indication, control damping, rotation damping, detent feedback feel, adjustable, comply with IEC 60945 standard, electromagnetic compatibility (EMC), vibration, functional customization, compact design, rugged construction, high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5 ~ 55 °C	≤0.5%	IP56

Detail

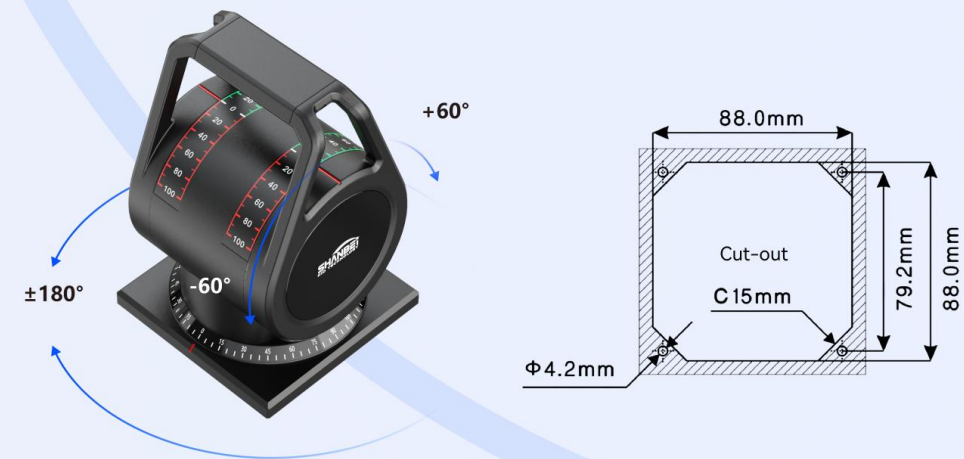

Appearance & function options

(Note: The first option is the default)

Handle style	• Dual handle synchronize			• Dual handle independent		
Operating range	• ±60°		• 0~60°		• -15~60°	
Rotation range	• ±180°					
Output signal	• Propulsion/rotation: 4~20mA		• Propulsion 5K/ rotation sincos		• Switch	
Backlight adjustment	• 0~24V					
Operation position	• FWD		• AFT			

Dimensions



WLF-80 Tugboat Azimuth control lever



Product introduction

The WLF-80 full-rotation control handle is used in situations such as tugboats or test equipment where both speed and position need to be adjusted simultaneously. It is generally placed on an electrical centralized control console to control the azimuth Angle, tilt Angle, thrust, and speed of the thruster in a linked manner.

Made of all-aluminum alloy, the handle is black and powder-coated. The scale is backilluminated. The control damping, rotation damping and gear feedback feel are adjustable. It meets the electromagnetic compatibility and vibration requirements of IEC60945 standard. It has the advantages of compact design, solid structure and high precision.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5 ~ 55 °C	≤0.5%	IP56

Detail



Appearance & function options

(Note: The first option is the default)

Operating range	• 0~100°
Rotation range	• ±180°
Output signal	• Propulsion/rotation: 4~20mA
Backlight adjustment	• 0~24V
Operation position	• FWD • AFT

Dimensions



WLF-150 Rudder control hand wheel



Product introduction

The WLF-150 steering wheel is used for the follow-up steering control of various types of ships. Inside the steering wheel, there are luminous Pointers and backlit scale plates. The helmsman turns the steering wheel to send the steering order externally.

Aluminum alloy panel, large scale display area, integrated backlight adjustment, and support for synchronous control of electric axes.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5~55℃	≤0.5%	IP56

Handwheel type




Plastic



Aluminium alloy

Detail

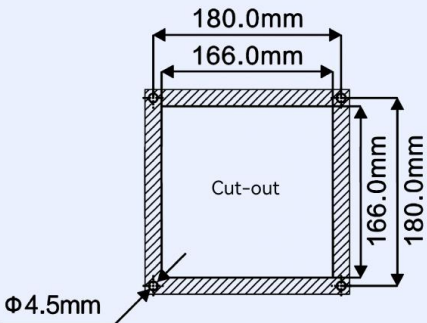

Appearance & function options

(Note: The first option is the default)

Handwheel style	• Aluminum alloy	• Plastic
Film scale [Rotation range] (Five optional choices)	• ±140° [±45° Uniform]	• ±140° [±45°(±5° wider)] • ±140° [±50° Uniform]
Output channel	• Single channel	• Dual-channel
Output signal	• 5K potentiometer	• 4~20mA
Electric shaft synchronization	• No	• Yes

Dimensions



WLF-40 Mini rudder control lever



Product introduction

The WLF-40 mini rudder control lever is used for the servo control of the ship's steering system. It can send out rudder command values and is equipped with a potentiometer and a dial.

Aluminum alloy housing, metal handwheel, damping feel; adjustable backlight dial; customizable different range dials and rotation angles.

Basic index

Supply voltage	Working temperature	Feedback accuracy	Protection level
24VDC	5~55℃	≤1.0%	IP56

Handwheel type




Steering wheel



Grip

Detail

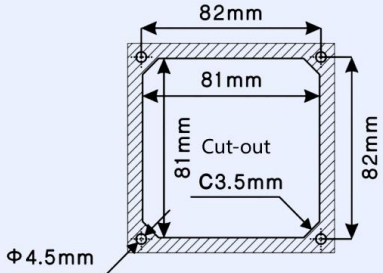

Appearance & function options

(Note: The first option is the default)

Handwheel style	• Steering wheel • Grip				
Film scale	• ±35°	• ±45°	• ±50°	• ±100%	• Others
Scale customization	• Average scale		• 0~5° scale is widened		
Rotation range	• ±60°	• ±90°	• ±140°		
Output channel	• Single-channel single potentiometer output		• Dual-channel dual potentiometer output		
Output method	• Standard 5K potentiometer output		• 4~20 milliampere current output		
Electric shaft synchronization	• No		• Yes		
Protective rear cover	• No		• Yes		

Dimensions



WLF-75M Mode Selector



Product introduction

WLF-75M mode selection switch, used for circuit selection and switching of various control systems. The product adopts an engineering plastic shell that is beautiful and elegant, with long-life contact points, and can be customized for appearance, engraving, and contact points.

Stable and reliable, with professional quality and high cost-effectiveness, it can be customized according to needs.

Basic index

Mechanical lifespan	Working temperature	Number of positions	Working voltage
> 300K cycle	5~55℃	various	≤500V

Dimensions



WLF-75A Non-follow-up handle



Product introduction

WLF-75A non follow-up handle, also known as emergency rudder handle, is generally installed in the rudder compartment, driver's console, bridge wings, and other positions, used for servo operation in case of failure in automatic and follow-up steering modes. The product adopts an engineering plastic shell that is beautiful and elegant, with a spherical handle that is easy to grip, a long-life contact point, and a self resetting spring. When released, it can return to the center position and disconnect the output signal.

Stable and reliable, with professional quality and high cost-effectiveness, it can be customized according to needs.

Basic index


Mechanical lifespan	Working temperature	Operating range	Self reset
> 100K cycle	5~55℃	-45~+45°	Yes

Dimensions



WLF-10P Multifunction Joystick

Detail

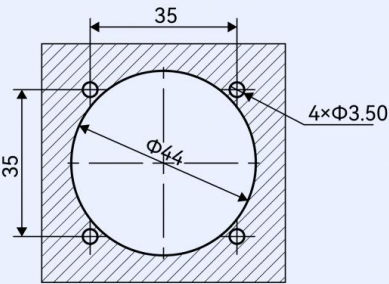

Product introduction

The WLF-10P is a multi-functional joystick supporting 1, 2, and 3-axis operations, with rotation ranges of 52 degrees for the X and Y axes, and 160 degrees for the Z axis. It is equipped with high-precision potentiometers and is specifically designed for various maritime and offshore automation control systems. Constructed from full aluminum alloy, it features zero deadband, individually adjustable damping for each axis, and a conical rubber dust cover, making it suitable for use in harsh operating conditions.

Designed to be compact, structurally robust, and of high precision.

Basic index

Supply Voltage	Operating Temperature	Feedback precision	Protection Rating
24VDC	-20~70°C	≤1%	IP56

Appearance & function options

(Note: The first option is the default)

Direction of motion	• X	• Y	• X+Y	• X+Y+Z
Output signal	• 5K Potentiometer			
Built-in switch	• No	• Yes		
Automatic centering	• No	• Yes		

Dimensions



WLF-10H Multifunction Joystick



Product introduction


The WLF-10H is a newly designed multifunctional joystick that supports 1, 2, and 3-axis operations. The rotation ranges for the X-axis and Y-axis are 48 degrees each, while the Z-axis can rotate up to 180 degrees (without buttons). It employs non-contact Hall sensors internally, ensuring no wear, smooth operation, and is specifically engineered for various maritime and offshore automation control systems. Constructed from full aluminum alloy, it features a zero-position lock, individually adjustable damping for each axis, backlighting, and supports customization of the grip and installation panel.

Aesthetically pleasing in design, powerful in functionality, and high in precision.

Basic index

Supply Voltage	Operating Temperature	Feedback precision	Protection Rating
24VDC	5~55℃	≤1%	IP56

Detail

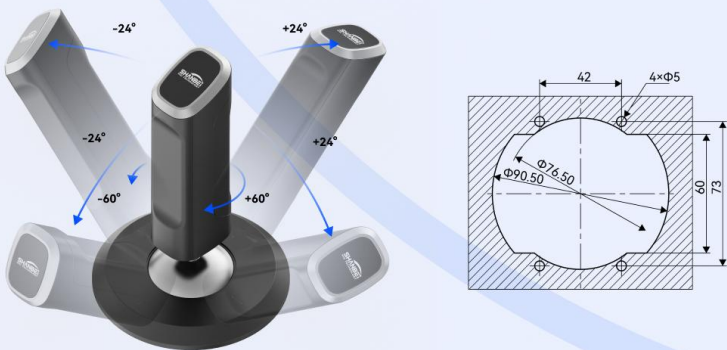

Appearance & function options

(Note: The first option is the default)


Direction of motion	• X	• Y	• X+Y	• X+Y+Z
Output signal	• Non-contact Hall sensor			
Built-in switch	• No	• Yes		
Automatic centering	• No	• Yes		
Button Integration	• No	• Yes		
Backlit logo design	• No	• Yes		

Dimensions



Monitor & Instruments



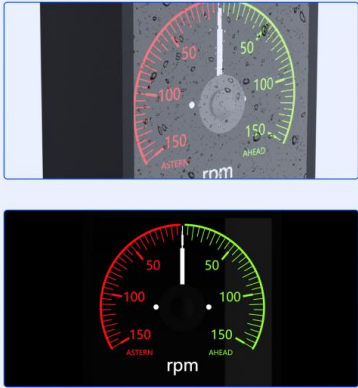

Product introduction

The WEI&WSI series instruments are the latest digital instruments developed by the company, installed on the bridge control panel, used to display information such as speed, rudder angle, power, pitch, and orientation.

High indication accuracy, stable data, reliable quality, and support for customized appearance functions.

Basic index

Supply voltage	Working temperature	Indicating angle	Protection level
18~26VDC	-5~55℃	240° or 360°	IP56

Appearance & function options

Indicating accuracy	• 1.5 level
WEI Option	• RPM • MW • Rudder • Pitch
WSI Option	• Full Rudder Angle
Protection	• waterproof • anti salt spray • backplate protective shell
Specifications	• 72*72 • 96*96 • 144*144
Interface	• 4~20mA • 0~10V
Customization	• Special specifications can be customized: dial size, input signal

Dimensions



WDM-96P Dimmer



Product introduction

The WDM-96P series dimmer is used for individual dimming of backlit devices such as handles and instruments, and is generally installed in centralized control spaces, driver's consoles, and other locations. The product adopts knob dimming, potentiometer output, aluminum alloy panel processing, front spray molding, and back conductive oxidation with conductive sealing ring. The product has the advantages of being sturdy, reliable, and having good electromagnetic compatibility.

One stop dimming solution, customized and developed according to needs.

Basic index

Potentiometer resistance value	Working temperature	Rotation range	Protection level
1~200K optional	5~55℃	0~300°	IP56

Dimensions



WSS-R68 Non-contact angle sensor




Product introduction

The WSS-R68 non-contact angle sensor, installed in the steering gear compartment, converts the angle and direction of the rudder blade into electrical or digital signals and transmits them to a receiver. It is a critical component of the autopilot system or rudder angle indication system, and the accuracy and stability of its angle acquisition have a significant impact on ship maneuverability. The product employs non-contact magnetic induction technology, which completely eliminates mechanical wear and extends the service life. With a sampling resolution of 16 bits, it ensures optimal accuracy and performance.

Basic index

Supply voltage	Output signal	Accuracy	Protection level
18~26VDC	CAN	0.1°	IP65

Dimensions

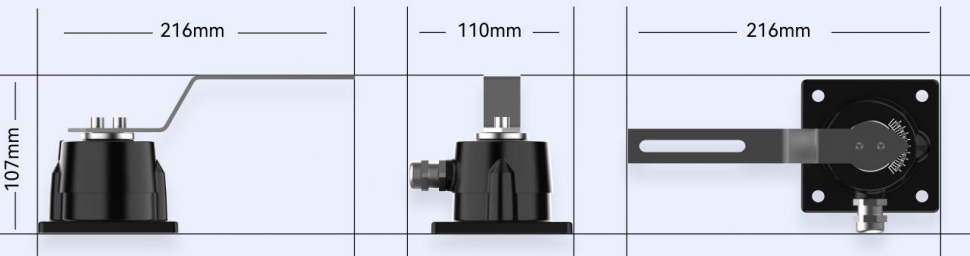

WMF-073 Multi function display unit



Product introduction


The WMF-073 multifunctional display unit is the latest product launched by Shanbei Technology Company to improve ship human-machine interaction performance. It is designed to achieve maximum speed and performance and is a "multi in one" maritime specific display device. The ultra fast six core processor improves rendering speed and page conversion speed, greatly reducing startup time and providing you with a smooth operating experience. Including NMEA2000, NMEA0183, Ethernet, USB and other interfaces to meet your various system application needs.

High brightness display screen, dedicated for maritime use, with high protection level, open source platform, customized development.

Basic index

Supply voltage	Working temperature	Screen size	Interface
18~26VDC	5~55℃	7-inch touch screen	4 types

Dimensions

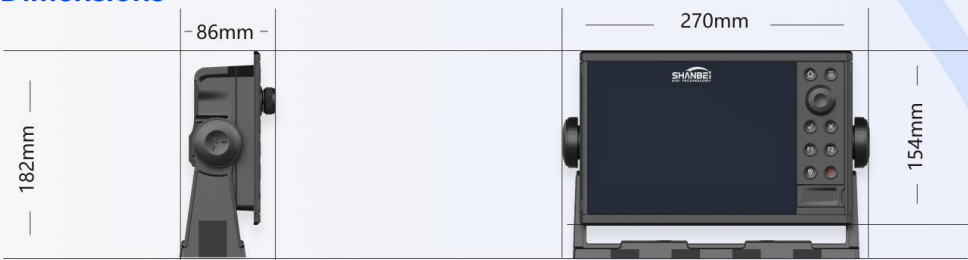

WPM-P Shaft power meter



Product introduction



The WPM-P shaft power meter is an instrument used for long-term continuous measurement of speed, torque, power, and thrust (optional). It is designed according to maritime regulations and can be used for power monitoring of ship main engine shaft systems, thrusters, and generator shafts. It provides reliable and real-time data support for various power management systems and energy efficiency management systems.

Non contact measurement, wireless induction power supply, strong adaptability, with a maximum data storage time of up to 5 years, applied to large-scale power and transmission devices such as marine diesel engines and gearboxes, mining machinery, and offshore wind turbines.

Basic index

Supply voltage	Accuracy	Working temperature	Output signal
AC220	0.1%	5~55℃	Analog and digital

Dimensions

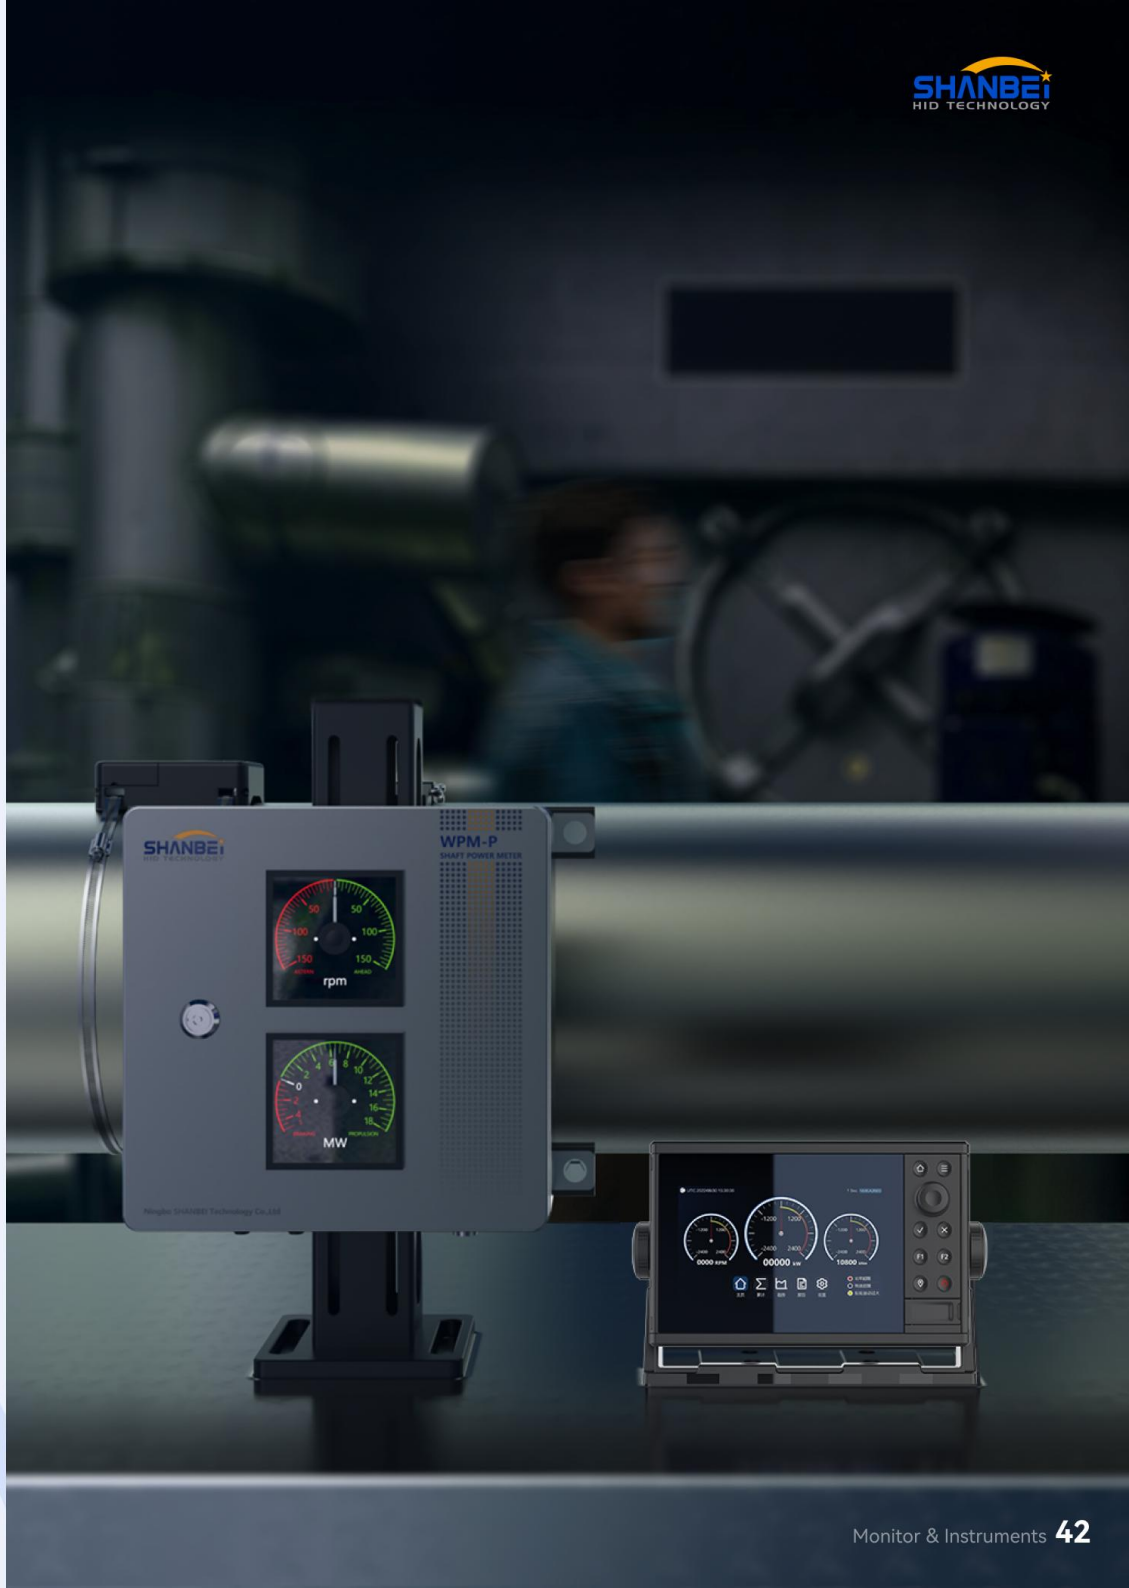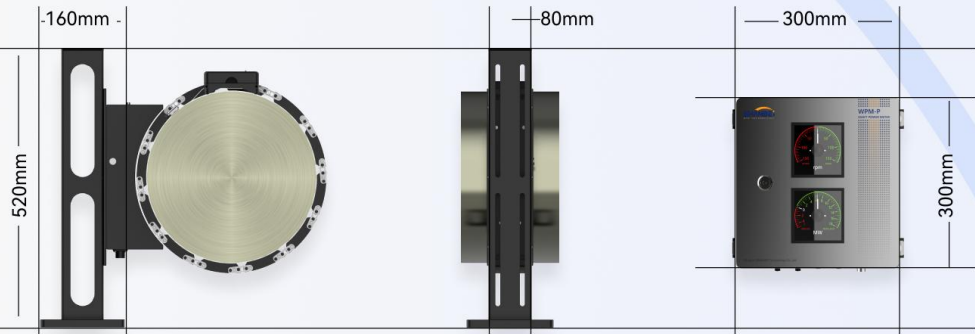

Display instrument



Real time display of the main engine's speed and power.

Control box



Multi function display



Real time measurement of main engine shaft power, torque, thrust, and speed parameters, while achieving cumulative calculation of main engine shaft power and speed, with overload and stress protection functions, and can also generate corresponding test and navigation reports.

C1 - Main power 110/230VAC

C2 - Cable to stator,default 1m, optional 15m for Wall mounted installation.

C3 - Optional analog output cable.

C5 - CAN-bus cable

C4 - Optional RS485 output cable.

Engine

W2K NMEA2000 bus topology connects the system



Product introduction

The W2K Series NMEA2000 backbone topology connection system is used for connecting NMEA2000 devices onboard vessels. NMEA2000 is a combined electrical and data specification for data network communication between marine electronic devices, such as electronic chart displays (or chart plotters), autopilots, main engine remote controls, echo sounders, GPS antennas, and various other sensors and navigation instruments. Developed on the basis of NMEA0183, NMEA2000 adopts CAN (Controller Area Network) bus technology, which originated from the automotive industry. It is particularly suitable for operation in complex electromagnetic environments and features excellent anti-interference capability.

Basic index

Supply voltage	Rated current	Working temperature	Protection level
250VDC	4A	-20~85℃	IP67

System composition

NAME	TYPE	Inclusion
	Start-up package W2K-KS	One 5-core single-ended power cable, one 1-meter double-ended cable, one 6-meter double-ended cable, two T-type connectors, and two terminal resistors.
	Expansion Kit W2K-KT	1 meter of dual-head cable, 1 T-type connector
	Terminal resistor kit W2K-KR	1 male head, 1 female head, W2K-C4, W2K-C5
	Maintenance kit W2K-KD	1 PCB-type connector, 1 cable-outlet connector, 2 two-meter double-ended cables, 2 T-connectors, 2 terminal resistors.

Remote control



WFU-500 Follow-up steering system



Product introduction


The WFU-500 follow-up steering control system is used to transmit steering commands from the cab to the power equipment of the servo device. It consists of a follow-up steering wheel, a steering angle feedback device, a steering angle meter, a follow-up control unit, etc. When in use, the steering command is given by the follow-up steering wheel. The follow-up control unit compares the actual steering angle and outputs instructions to control the left and right solenoid valves, continuously adjusting the steering angle, and realizing the servo to follow the steering wheel command to rotate.

Simple, reliable, high-precision, cost-effective, easy to operate, supporting dual rudder independent control.

Basic index

Supply voltage	Steering range	Adapted hydraulic steering gear	Accuracy
18~26VDC	-45~+45°	solenoid valve type	≤0.5°


System composition

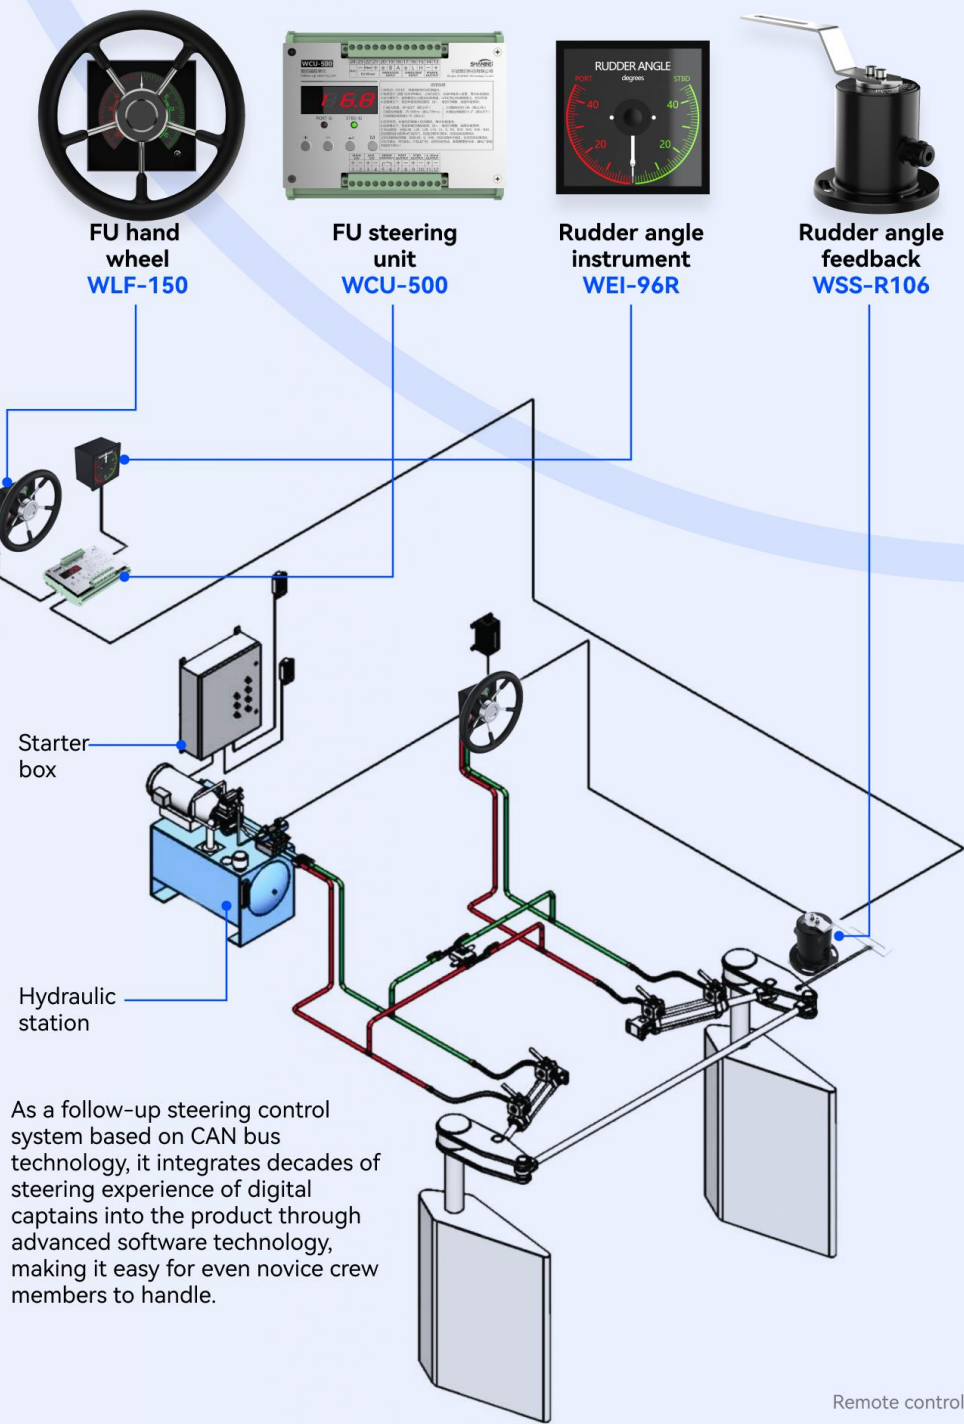

As a follow-up steering control system based on CAN bus technology, it integrates decades of steering experience of digital captains into the product through advanced software technology, making it easy for even novice crew members to handle.

WET-200 Main engine electronic control system

Dual main engines



Single main engine



Propulsion control lever
WLF-90D
or WLF-90R

Main engine electronic control unit
WCU-200

Main engine electronic actuator
WAC-80-1

Product introduction

The WET-200 electric throttle control system is used for remote and precise adjustment of engine throttle opening, consisting of a control panel, main control unit, actuator, and related accessories. When in use, the throttle percentage opening is provided by the control handle, and the main control unit compares the command value with the actual value, continuously adjusting the length of the actuator extension, thereby achieving precise adjustment of the engine speed. The product has advantages such as high protection level, high adjustment accuracy, and simple use.

Reliable protection, corrosion resistance, high cost-effectiveness, convenient operation and maintenance, applied in agricultural machinery, maritime vessels, engineering machinery, automation, etc.

Basic index

Power supply voltage	Actuator stroke	Maximum speed	Internal protection
18~26VDC	80mm	30mm/s	Triple protection

Application field

Applicable to agricultural machinery, marine vessels, construction machinery, automation, etc. (the product shown below is an electric throttle actuator.)





WSS-H76 Heading sensor



Product introduction

The WSS-H76 heading sensor is mainly used for real-time detection of ship heading values. Through the built-in 9-axis electronic compass and high-precision GPS module, stable heading values can be obtained and converted into standard NMEA0183 data protocol for output to devices such as autopilots, radars, AIS that require heading data. At the same time, it can also output longitude, latitude, and tilt data, which is stable, reliable, convenient to use, and compact in size. The product can also be used in conjunction with our company's turntable compass repeater and signal distributor for displaying, distributing, and outputting data. It can be widely applied to various types of ships.


Low cost, customizable communication protocol, and fast positioning.

Basic index

Heading accuracy	Tracking speed	Positioning time	Protection level
1°	30°/s	< 3min	IP66



Dimensions

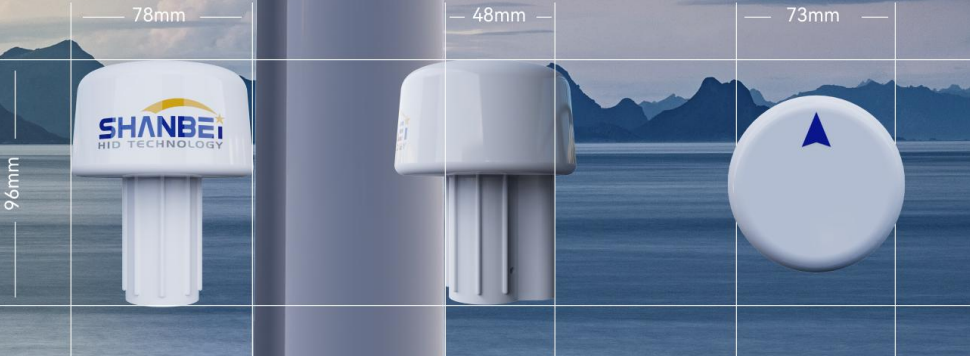

WCU-0308 Heading distributor



Product introduction

The WCU-0308 heading distributor is used to amplify and output the input NMEA0183 format digital heading signal to other devices, such as radar, AIS, repeater, autopilot, chart reader, etc. It can support electric compass, satellite compass, electronic compass magnetic compass sensor and other directional sources. The current input heading value can be displayed on the top of the heading distributor, with signal input and power indicator lights. It has four working modes, and the product is stable, reliable, and easy to install.

Digital display, convenient to use, multi-source integration, and powerful functionality.

Basic index

Supply voltage	Working temperature	Output port	Working modes
18~26VDC	5~55℃	8 channels	4 types

Dimensions



WSI-H192A Compass repeater




Product introduction

The WSI-H192A compass repeater is a device that accurately and in real-time feeds back ship heading information to the control room. This product adopts standardized design in terms of size and can be freely selected for desktop or embedded installation according to actual situations.

Basic index

Supply voltage	Working temperature	Display accuracy	Protection level
18~26VDC	5~55℃	0.1°	IP56

Dimensions

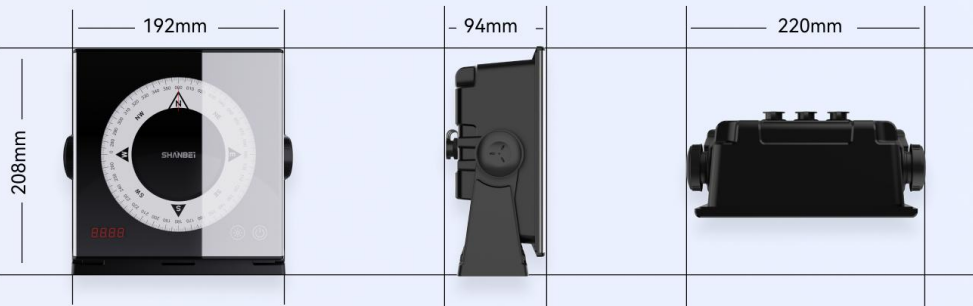

WSC-70 Satellite compass



Product introduction


The WSC-70 satellite compass adopts advanced satellite navigation technology, which can provide high-precision positioning and heading data for various navigation equipment, such as radar, electronic nautical charts, AIS, autopilots, and other types of ship equipment and systems.

Streamlined appearance, precise and stable data, with a heading accuracy of 0.2 ° RMS; Inertial navigation assisted positioning, easy to install, maintenance free, and calibration free.

Basic index

Heading accuracy	Dynamic attitude accuracy	Positioning accuracy	Protection level
0.2°	0.1°	1.5m	IP66

System composition

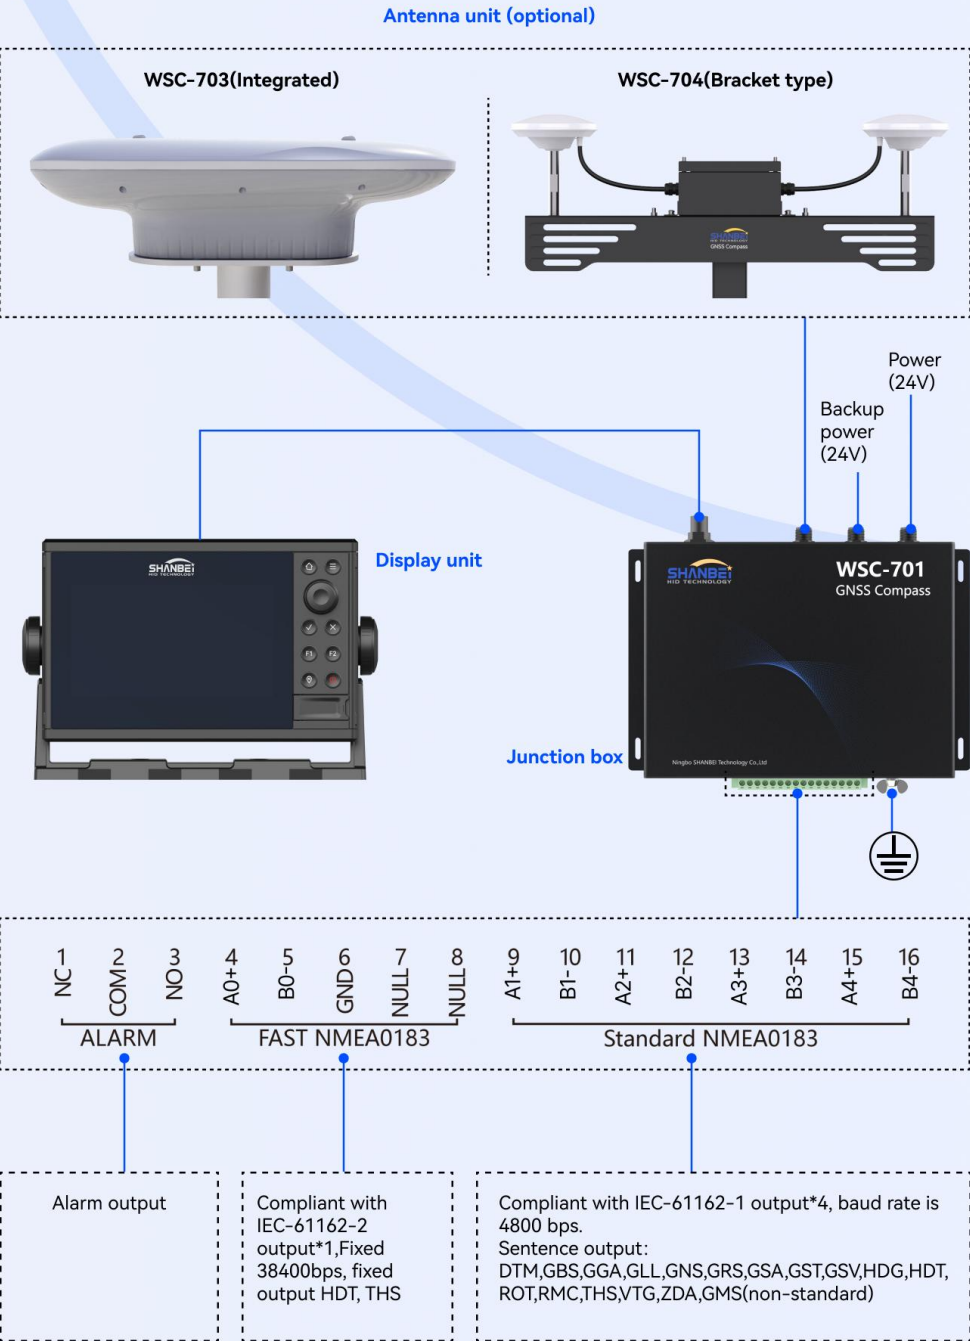


Antenna unit (Integrated) WSC-703



Dimensions



Antenna unit (Bracket type) WSC-704

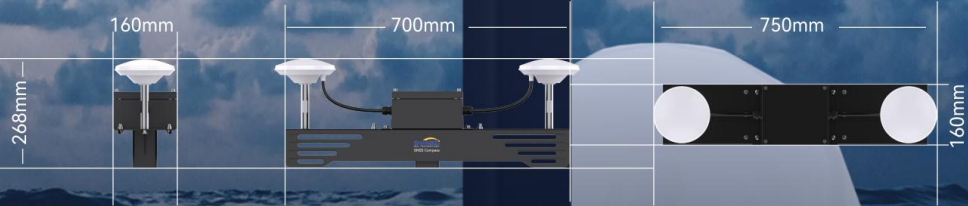

WCI-370 Rudder panoramic indicator



Product introduction


The WCI-370 rudder panoramic indicator is installed on the ceiling of the cockpit to indicate the direction and angle of the ship's rudder angle. The product adopts a digital CAN bus interface, which has the advantages of long communication distance and strong anti-interference ability. The product adopts a long lifespan, LED light analog scale, with one LED light per degree angle, indicating an accuracy of 1°. It uses a three digit digital tube to display the rudder angle value, with a display accuracy of 0.1 degrees.

No moving rotating parts, simple and reliable, digital transmission, stable communication.


Basic index

Supply voltage	Working temperature	Indicating area	Protection level
18~26VDC	5~55℃	3*70°	IP40

Dimensions

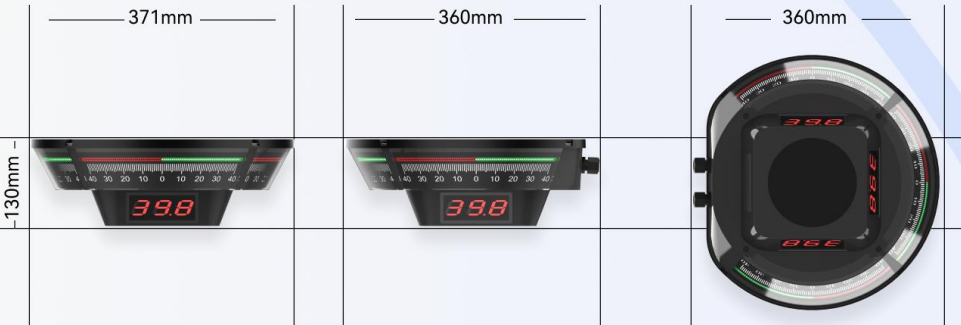

WDI-8AO Rudder angle distributor

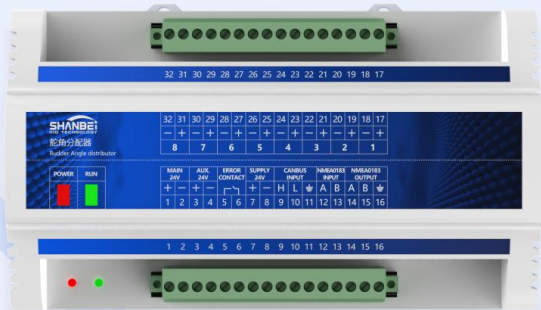

Product introduction

WDI-8AO rudder angle distributor is used to process rudder angle signals from rudder angle feedback devices or rudder angle transmitters, send them to various indicators, and simultaneously power the rudder angle feedback devices. It sends the actual rudder angle signals to VDR as NMEA0183 signals. The product adopts an engineering plastic shell, which is beautiful and elegant. It is installed on DIN35 guide rails, with dual power supply, 8 analog output channels, and a system fault alarm output.

Rich interfaces, imported components, professional design, stable and reliable.

Basic index

Feedback signal	Indicator signal	Number of channels	VDR output
CAN or RS485	8-ch 4~20mA (or ± 10V)	8	Yes

Dimensions



WSS-R106 Single potentiometer type rudder angle feedback



Product introduction

The WSS-R106 rudder angle feedback device, also known as a rudder angle sensor or transmitter, is installed in the rudder compartment and can convert the angle and direction of the rudder blades into electrical or digital signals to send to the receiver. It is an important component of the autopilot system or rudder angle indicator system, and the accuracy and stability of its angle acquisition have a significant impact on control.


Basic index

Supply voltage	Steering range	Accuracy	Protection level
18~26VDC	-45~+45°	0.5°	IP65

Dimensions



WSS-R270 Multi-potentiometer type rudder angle feedback

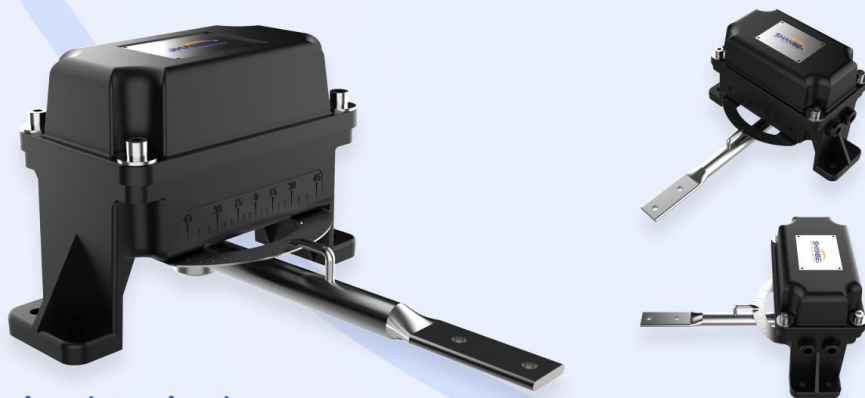

Product introduction

The WSS-R270 rudder angle feedback device is installed in the rudder compartment and is used to convert the mechanical angle of the rudder into electrical or digital signals in real time, and transmit them to receiving modules such as rudder angle indicators, rudder angle distributors, etc. The product adopts standard potentiometer output or digital CAN bus output, which has the advantages of long communication distance and strong anti-interference ability. The product adopts a lever type transmission structure, ensuring the reliability of the servo transmission. The internal use of gear transmission and double support structure effectively eliminates external vibration of the servo, improves the working life of the sensor, and the multi potentiometer design improves the redundant reliability of the product.

Basic index

Supply voltage	Steering range	Maximum number of potentiometers	Protection level
18~26VDC	-45~+45°	4	IP65

Dimensions

